



Sand Penetrometer



Use the Sand Penetrometer to determine the likelihood of having fried egg lie development in your sand traps. With the easy to use Sand Penetrometer, you can test your bunker sand right on your own golf course to determine if the golf ball will be buried or sit up and be playable.

Simply slide the red ring down against the instrument handle, grip the knurled portion of the handle and place the attached golf ball over the bunker sand that you will be testing. Then by pressing downward evenly on the Sand Penetrometer until the attached golf ball reaches the line located at the center, read the results.

Read the unconfined strength in Tons per Square Foot or Kilograms per Centimeter Squared. The reading is located on the lower side of the red ring - (side closest to the knurled handle).

This tool is excellent if you are re-constructing sand traps, renovating sand traps or just adding new sand to existing bunkers.


<u>Specifications</u>
Direct-reading scale in tons/sq. ft. and kg/sq. cm.
Ground and polished stainless steel loading piston.
Calibrated spring and Penetrometer body plated for rust resistance and long life.
Range 0.25 to 4.5 tons/sq. ft. (kg / sq.cm).
Scale Divisions. 0.25 tons/sq. ft. (kg / sq.cm).
Load Piston. 1/4" (6 mm) diam.; stainless steel.
Dimensions 3/4" diam. x 6-3/8" Inch (19 x 162 mm).
Net Weight 10oz. (283 g).

Turf-Tec International

1471 Capital Circle NW, Ste # 13 Tallahassee, FL. 32303 USA

Order Line (800) 258-7477 - Phone (850) 580-4026 - Fax (850) 580-4027

Website: www.turf-tec.com

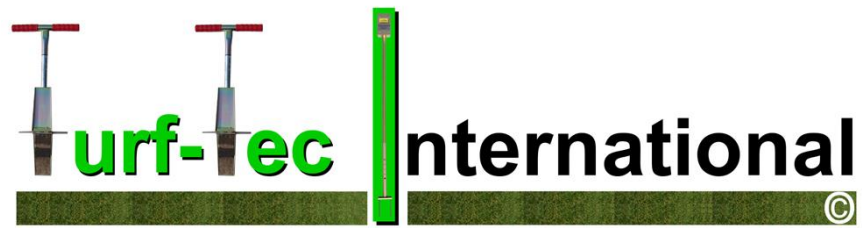

Sand Penetrometer - PN5-S Instructions

1. The red ring on the barrel of the Sand Penetrometer holds the maximum reading of the scale for easy reading.
2. Slide the ring down against the instrument handle.
3. Grip the knurled portion of the handle and place the golf ball over the sand that you will be testing. Ideally sand should be dry and at least four inches thick.
4. Press downward evenly on the sand Penetrometer until the golf ball reaches the line located at the center of the ball.
5. Read the unconfined strength in Tons per Square Foot or Kilograms per Centimeter Squared. The reading is located on the lower side of the red ring - (side closest to the knurled handle).
6. Test an average of three times and disregard results that are too far away from the average.

Use the chart below to determine the likelihood of having fried egg lie development.

Potential for Fried-Egg Lies	
Penetrometer Reading	Fried-Egg Potential
Greater than 2.4 kg/cm ²	Very Low tendency to bury
2.2 to 2.4 kg/cm ²	Slight tendency to bury
1.8 to 2.2 kg/cm ²	Moderate tendency to bury
Less than 1.8 kg/cm ²	High tendency to bury

Particle Size Analysis and Sand Distribution.

A sieve analysis should also be performed on the sand to be sure it is in the following specification range.


Sand Particle Size	
Gravel	No more than 3%
Very Course Sand	No more than 15%
Coarse and Medium Grade Sand	At least 65%
Medium Fine and Very Fine Sand	No more than 25%
Silt and Clay	No more than 3%

Turf-Tec International

1471 Capital Circle NW, Ste # 13 Tallahassee, FL. 32303 USA

Order Line (800) 258-7477 - Phone (850) 580-4026 - Fax (850) 580-4027

Website: www.turf-tec.com

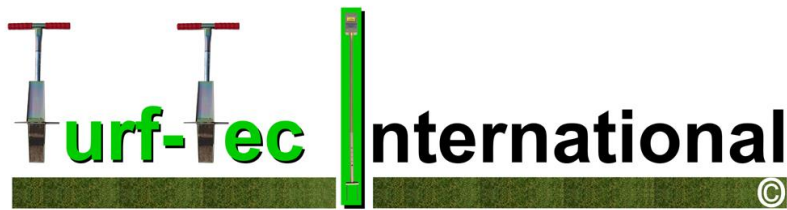

Sand Particle Shape

The shape of the sand particles has a strong influence on playing quality and maintenance. A sand particle's shape is classified by examining both the relative sharpness of the particle's edges and the overall shape of the particle itself. The surface of particles can range from very angular (many sharp, well-defined edges) to well rounded (smooth surfaces). The shape of the particle can range from low sphericity (an elongated particle) to high sphericity (a particle that is nearly round).

The angularity and sphericity of the particles have a strong influence on the playing quality of the sand. For example, a low-sphericity, very angular sand generally has high resistance to fried-egg lies. Such sands also tend to stay in place better on the face of the bunker. However, this same sand would produce very firm bunkers that some players may find objectionable. Well-rounded, high-sphericity sands can produce fried-egg lies and are more likely to move off the bunker face during maintenance and irrigation rainfall.

Sands usually consist of a mixture of particle shapes and sizes. This is important to the stability and playing quality of the sand. Again, as a general rule, sands that are highly uniform in size range and shape (particularly if rounded with high sphericity) tend to be less stable than a sand that has a wider range of particle dimensions. A Macroscopic is ideal for determining and classifying the shape of sand particles.

Crusting and Set Up

Crusting is the formation of a layer of dried, stiff sand on the surface of the bunker. Such layers typically are 1/8 to 1/4 inch in thickness, and they severely decrease the playing quality of the bunker. Sands that are prone to crusting require more frequent raking to maintain good playing quality. If the crusting potential is high, the bunkers will require raking following each irrigation and rainfall event. This greatly increases the labor required to keep the bunkers in good condition.

Crusting is directly related to the percentage of silt and clay in the sand. As silt and clay increase, the severity of crusting increases as well. To test for crusting potential, simply wet a thin layer of sand and allows it to dry overnight. Then attempt to lift the layer on the edges using a spatula.

Credits

JIM MOORE *Green Section Record* Jan/Feb 1998 Vol. 36, #1


Dr. K. W Brown & Mr. J. C. Thomas, *Golf Course Management*, Vol 54, July 1986

Turf-Tec International

1471 Capital Circle NW, Ste # 13 Tallahassee, FL. 32303 USA

Order Line (800) 258-7477 - Phone (850) 580-4026 - Fax (850) 580-4027

Website: www.turf-tec.com

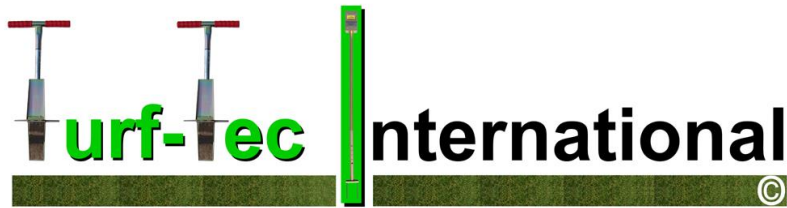

For Engineering Use

It should be noted that OSHA requirements applicable to excavation work, but not contained in the excavation standard, also have been included in this worksheet. Information on the different types of soil manual field tests is contained in Appendix A of 29 CFR 1926.652 and should be read prior to attempting. If soil field classification will be performed, a pocket penetrometer should be purchased for use in determining the unconfined compressive strength.

A copy of the standard "**Soil Classification - 1926 Subpart P App A**" should be reviewed at the U.S. Department of Labor Occupational Safety & Health Administrations website at www.osha.gov

Unconfined Compressive Strength (Ref. 3.1)

Instructions:

1. Within five minutes after a sample of broken soil is exposed to the open air, remove one or more of the largest clumps and analyze it with a pocket penetrometer.
2. Slice each clump with a spatula to provide a smooth surface for analysis.
3. Press the penetrometer cylinder against the sample and compress the soil and the calibrated spring of the instrument to the marked ring on the cylinder.
4. Read the position of the ring on the calibrated scale of the cylinder.
5. Record the unconfined compressive strength reading in tons per square foot (tsf) or kilograms per square centimeter (kg/cm²).
6. Report the average of at least three readings if possible.
7. Note all samples that break apart and do not provide a positive analysis.

References

3.1 Code of Federal Regulations, Title 29, Part 1926, Subpart P, 1999, pp. 372-409. U.S. Government Printing Office, Washington, D.C. 20402-9328

LIMITED WARRANTY OF TURF-TEC INTERNATIONAL PRODUCTS

Turfgrass Products Corporation - dba - Turf-Tec International ("Seller") warrants to the final purchaser, that all Turf-Tec International tools will be free from defects in material or workmanship for a period of one year from date of purchase. SELLER'S SOLE OBLIGATION AND YOUR EXCLUSIVE REMEDY under this Limited Warranty and, to the extent permitted by law, any warranty or condition implied by law, shall be the repair or replacement of parts, without charge, which are defective in material or workmanship and which have not been misused, carelessly handled, or improperly repaired by persons other than Turf-Tec International. To make a claim under this Limited Warranty, you must return the complete tool, transportation prepaid, to Turf-Tec International after contacting Turf-Tec International and receiving a return authorization number. Please include a dated proof of purchase with your tool.

ANY IMPLIED WARRANTIES SHALL BE LIMITED IN DURATION TO ONE YEAR FROM DATE OF PURCHASE. IN NO EVENT SHALL SELLER BE LIABLE FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES (INCLUDING BUT NOT LIMITED TO LIABILITY FOR LOSS OF PROFITS) ARISING FROM THE SALE OR USE OF THIS PRODUCT.

Hold Harmless Agreement

The seller shall protect, defend, indemnify and hold the purchaser and their respective assigns and their attorneys, accountants, employees, officers and directors harmless from and against all losses, costs, liabilities, claims, damages and expenses of every kind and character, as incurred, resulting from or relating to or arising out of the inaccuracy of results, injury of user, injury of sports participant, turfgrass loss, warranty, covenant or any agreement made by the seller in this agreement.

Turf-Tec International

1471 Capital Circle NW, Ste # 13 Tallahassee, FL. 32303 USA

Order Line (800) 258-7477 - Phone (850) 580-4026 - Fax (850) 580-4027

Website: www.turf-tec.com